




# WF Series Welded Hollow Metal Frame

## Features

- 16 or 14 gauge steel
- Three or four sided door frames, borrowed lites, side lites, or transom frames
- Double rabbet (Equal or unequal), single rabbet, double egress, or cased open
  - Custom profiles available to meet project specifications
- A40 or A60 galvanized
- Painted with rust inhibiting primer
- Face or Continuous Weld
- Up to 3 hour embossed UL fire label
  - Metal printed label (opt)
- Hardware reinforcements:
  - 7 gauge hinge reinforcement
  - 12 gauge closer reinforcement
  - 12 gauge surface hardware reinforcement
- Build to all published hardware locations
- Available Options: hospital (sanitary) stops, lead-lined
- See cut sheet for anchor options

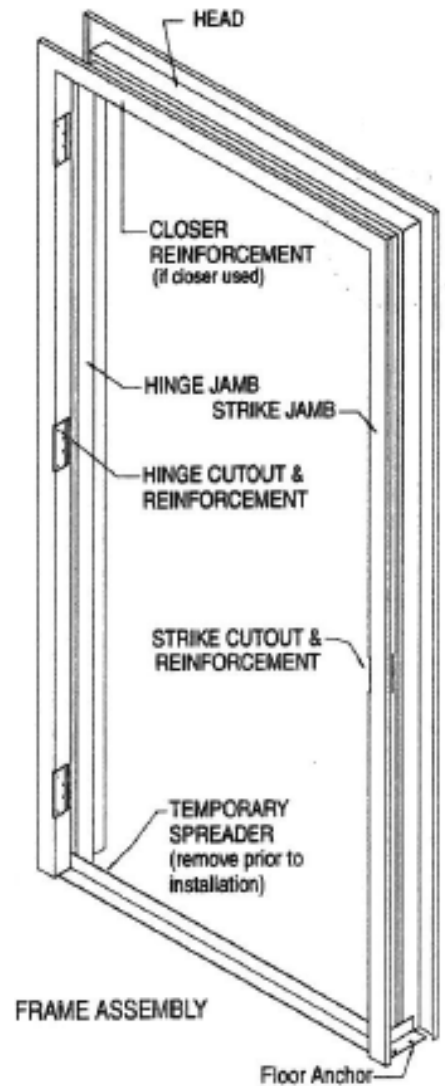

Typical Frame Sections