


PAIRED FRAME ORDER FORM

HdW Prep Codes:

1 = 3 ea 4 1/2" std Wt hinge per jamb
 2 = 3 ea 4 1/2" hvy Wt hinge per jamb
 3 = 3 ea 5" std Wt hinge per jamb
 4 = 3 ea. 5" hvy Wt hinge per jamb
 5 = 4 ea 4 1/2" std Wt hinge per jamb
 6 = 4ea. 4 1/2" hvy Wt hinge per jamb
 7 = 4 ea. 5" std Wt hinge per jamb
 8 = 4 ea. 5" hvy Wt hinge per jamb
 9 = Continuous Hinge
 E = Electric hinge code suffix
 DD = 3/4" Door position sWitch @ 6"
 EE = 1" Door position sWitch @ 6"
 AA = Universal flushbolt strike With mutes
 BB = Universal flushbolt strike no mutes

Anchors:

2 = Welded steel stud 'Z' anchor
 4 = Welded wood stud straps
 6 = Welded full width steel stud 'Z' anchor
 8 = Punch & Dimple (P&D)
 9 = Floor Anchor
 CA = Compression W/ base straps
 SA = Snap in combo stud anchor
 T = T Strap masonry anchors
 WA = Wire masonry anchors

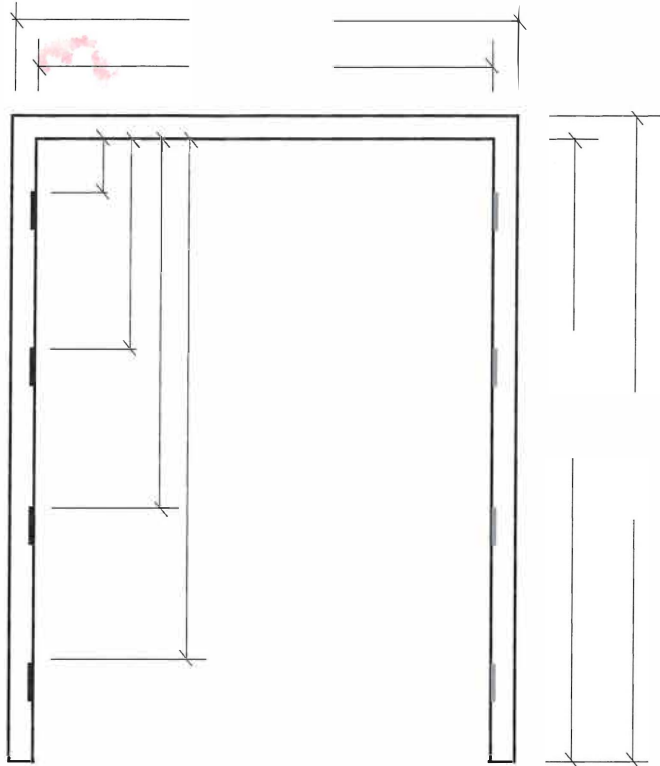

Manufacture HdW Locations

- ☐ Steelcraft
☐ Curries
☐ Other _____

Surface Reinforcements (SR):

R = Reg. Arm (RA)
 P = Parallel Arm (PA)
 TJ = Top Jamb
 P = Surf. OH Stop

Door	Overall Size:	Jamb Depth:	Throat Opening:	Profile Code:
Opening Size: ☐ 14	Finish: ☐ Fully Prime	☐ Unequal Rabbet	☐ Equal Rabbet	☐ 4" Face Head (Opt.)
Material: ☐ A40 ☐ Stainless				
HJ Prep:		Profile Codes: E2 = Equal Rabbet E4 = Drywall Returns S2 = Single Rabbet C3 = Cased Open DE = Dble Egress		
HD Prep:				
☐ Knocked-down (Installed K.D.)	☐ Knocked-down (Welded by others)	☐ Welded	☐ Full Throat Welded (Extra)	

* 1/2" Returns are standard for HMF's.

Instructions:

Qty:	Hand:	Reinforcements:		Anchors:	Fire Label:	Mark (opening) #
		Head	Jamb(s)			



Company Name:	P.O. #:	Job Name:	Page:	Of:
---------------	---------	-----------	-------	-----