





BE Series Steel Stiffened Door Features

- 18, 16, or 14 Ga. face skins
- 22 ga. steel hat channels
 - 20, 18, and 16 gage (optional)
- Mineral Fiberglass or Polystyrene Insulation
Continuously welded butte edge - seamless
- 16 Ga. inverted top and bottom channels
 - Flush top or bottom channels installed (optional)
- A40 Galvannealed steel
 - A60 (optional)
- Painted with rust inhibiting primer
- Hardware reinforcements:
 - 7 Ga. Butts
 - 12 Ga. Closer
 - 16 Ga. Lock box
 - 12 Ga. Plates for surface hardware
- Lite Kits:
 - Standard flush for 1/4" to 1" glass
 - Pre-manufactured lite kits (optional)
- Pre-manufactured louvers

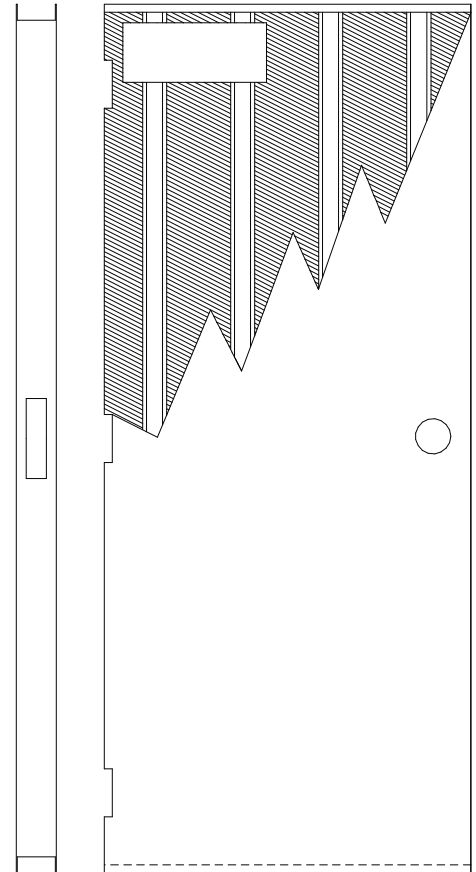

Up to 3 Hr Fire Rating - Flush Door

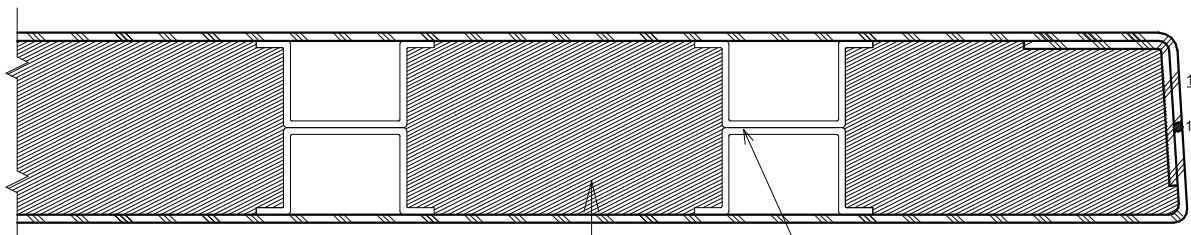

WELDED AT THE ENDS

MINERAL FIBERGLASS,
POLYSTYRENE INSULATION,
OR 10PFC DENSITY FOR 450 DEG TEMP RISE