






WF Series Welded Hollow Metal Frame

Features

- ∞ 16 or 14 gauge steel
- ∞ Three or four sided door frames, borrowed lites, side lites, or transom frames
- ∞ Double rabbet (Equal or unequal), single rabbet, double egress, or cased open
 - Custom profiles available to meet project specifications
- ∞ A40 or A60 galvanized
- ∞ Painted with rust inhibiting primer
- ∞ Face or Continuous Weld
- ∞ Up to 3 hour UL fire label
- ∞ Hardware reinforcements:
 - 7 gauge hinge reinforcement
 - 12 gauge closer reinforcement
 - 12 gauge surface hardware reinforcement
- ∞ Build to all published hardware locations
- ∞ Available Options: hospital (sanitary) stops, lead-lined
- ∞ See cut sheet for anchor options

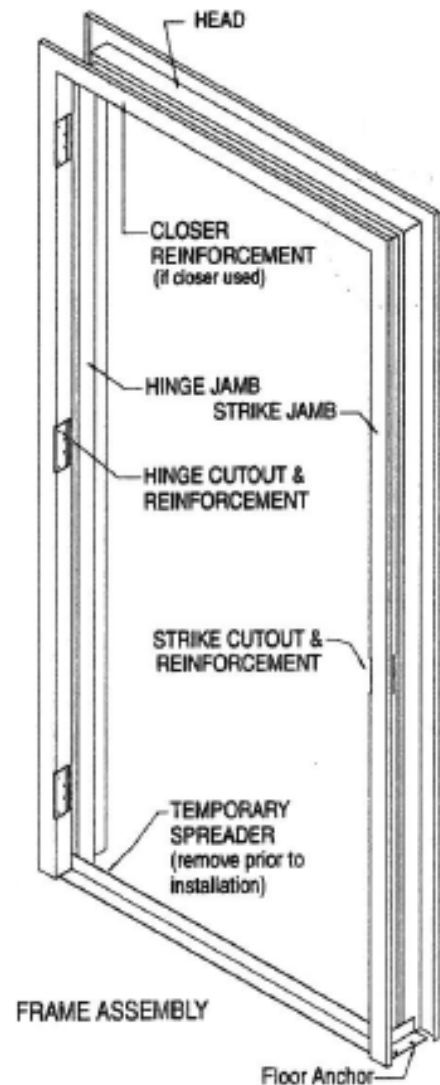

Typical Frame Sections